


P1: M-942H

Customer No: No.1

P2: M-Y668A

M-668A

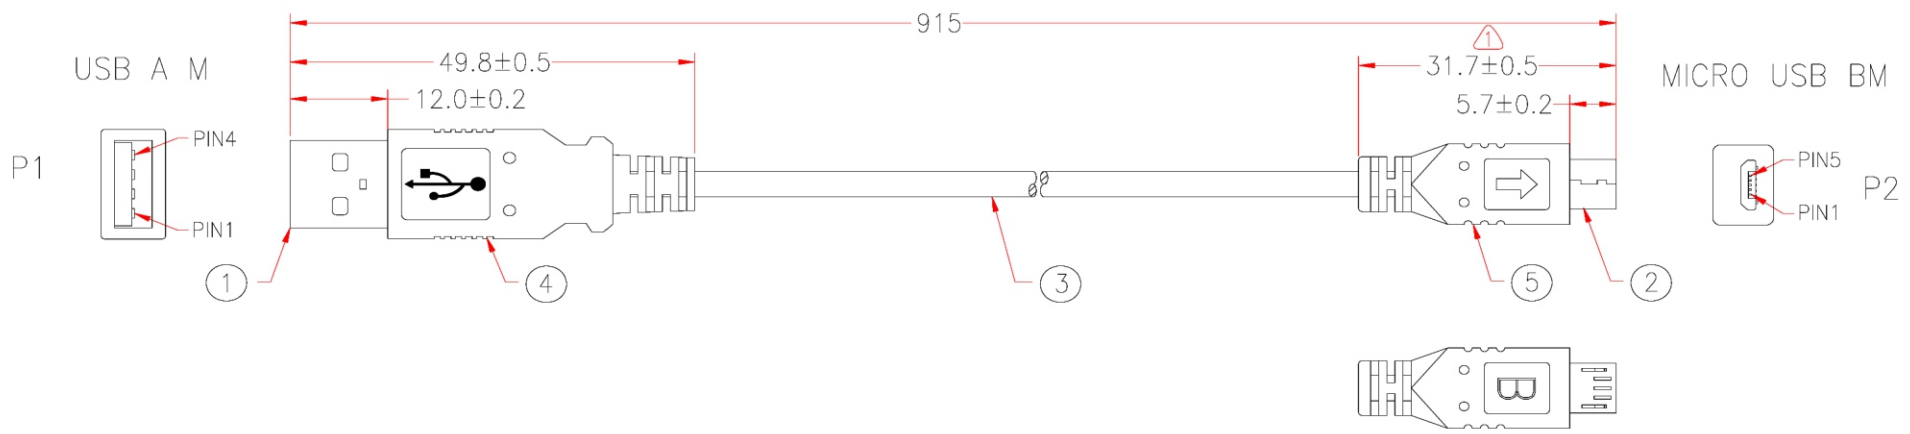

9F63-13					
P1		P2			
1	—————	1	RED	26#	
2	~~~~~	2	WHITE		
3	~~~~~	3	GREEN		
4	—————	5	BLACK	26#	
SHIELD	—————	SHIELD			

NOTE: All relevant materials are complied with RoHS directive .

5	MOLDED PE COLOR TRANSPARENT	A5BA02-7777		M7777
	MOLDED PVC BLACK	H1BF01-0304K09		M304
4	MOLDED PVC BLACK	H1BF01-0304K09		M304
3	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 26AWG, AMA BRAID SHIELDING WITH DRAIN WIRE, OD 4.5mm, JACKET BLACK, DRAWING No.EUAB2801P2602C-190	H5KH44-0304K09	895mm	M304
2	MICRO USB B MALE 2.0, GOLD PLATING 30u" CONTACTS, BLACK INSULATOR, SOLDER TYPE	A1HH26-0471	1	M471
1	USB A MALE, GOLD PLATED 30u ON CONTACTS, WHITE INSULATOR, CRIMP TWO PIECES TYPE	A1HA37-0454	1SET	M454
No.	DESCRIPTION		Q'TY	Supplier

APPROVED		<p><b>PCCABLES.COM INC</b>  <a href="https://www.pccables.com">https://www.pccables.com</a></p>	<p>Cable Length Unless Other Spec.          Tolerances:          0 ~200mm ±10mm          201~1000mm ±20mm          1001 ~1500mm ±25mm          1501~2100mm ±30mm          2100mm↑ ±40mm</p>		
CHECKED	HU				
DRAWING	XIAO				
DATE	19/JUL/19	ITEM NO.	<b>PCC-80517</b>	UNIT:mm	

	2019.07.19	MODIFFY PLUG		
	2012.05.25	MODIFFY MOLD SIZE	CHECKED	